
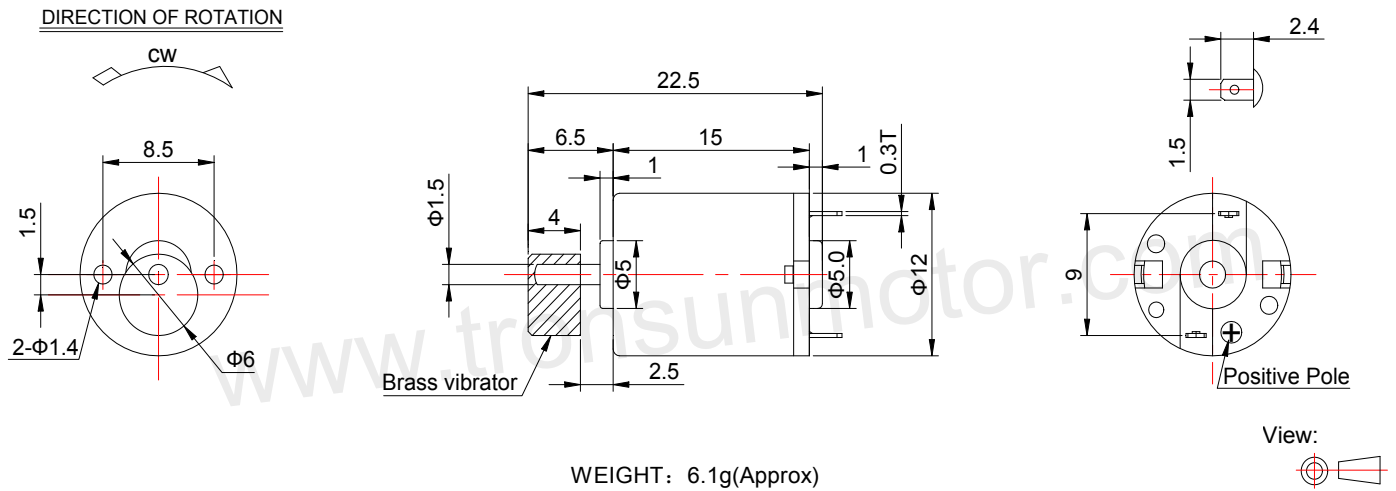


输出功率：约0.1~0.8W  
贵金属电刷马达  
典型应用： 成人玩具  
美容按摩仪

OUTPUT:APPROX0.1~0.8W  
Precious Metal-brush Motors  
Typical Applications: Adult Toys  
Beauty Massager

## 1.OUTLINE DRAWING:

UNIT:MM

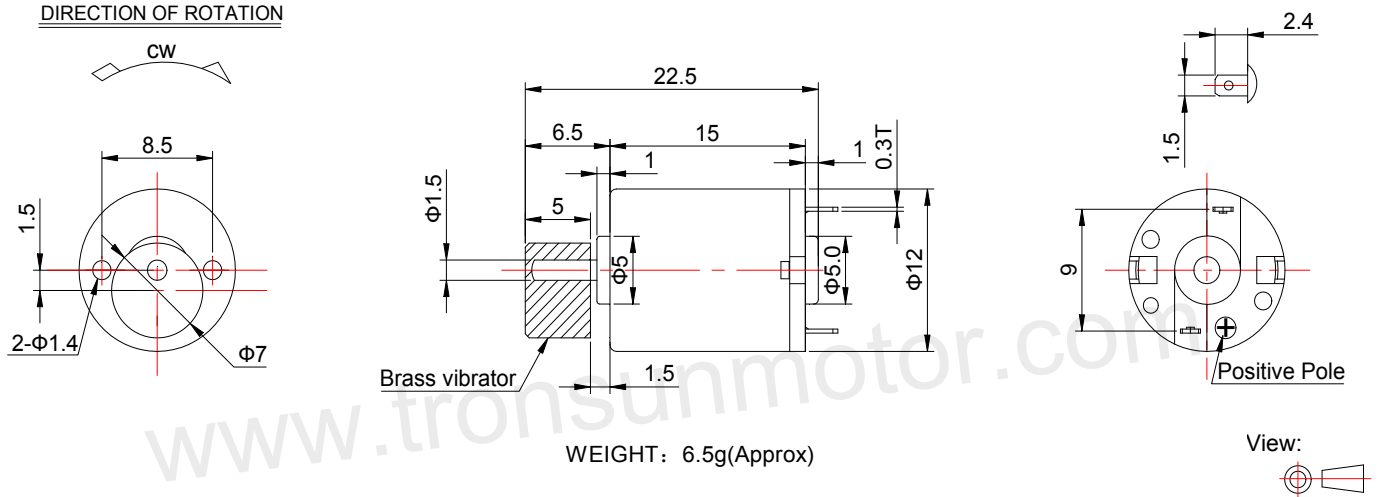

## 2.MOTOR PERFORMANCE :

MODEL	NO LOAD				RATED LOAD			STARTING	STALL
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	Brass vibrator	SPEED	CURRENT	VOLTAGE	CURRENT
		V	rpm	A		rpm	A	V	A
RF-1215CA-09180 Φ7*5	2.0~4.0	3.0	/	/	Φ7*5	9300	0.34	0.60	0.58
RF-1215CA-10150 Φ6*4	1.2~2.5	1.5	/	/	Φ6*4	8000	0.19	0.40	0.43